






HOSES

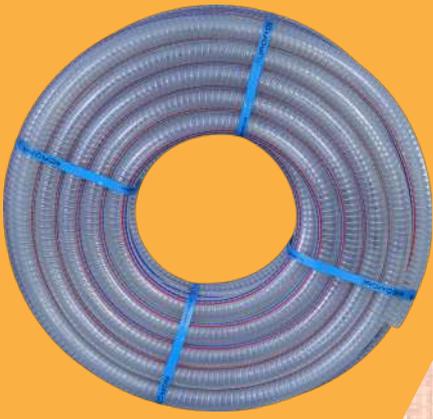

STEEL WIRE HOSES
INDUSTRIAL

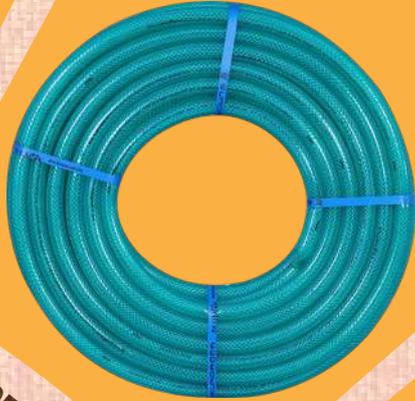

BRAIDED HOSES

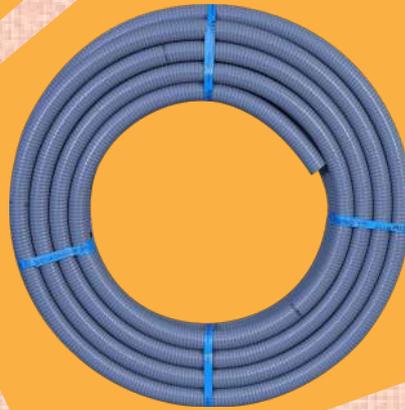

HEAVY DUTY INDUSTRIAL
SUCTION HOSES



LEVEL TUBE



PREMIUM HOSES



WELDING HOSES



SUCTION HOSES



ZEBRA HOSES



PE CORRUGATED HOSES



PNEUMATIC HOSES



GARDEN HOSES



ABOUT US

Euroaqua Plumtek Private Limited is an ISO 9001:2015 certified company specializes in manufacturing high-quality piping solutions. Originally founded as Sakkthi Polymers in 1997 by **Er. P. Mohan**, the company rebranded as Euroaqua Plumtek Pvt Ltd in 2019. With its headquarters in Sankari, Salem, Tamil Nadu, the company operates multiple branches across India.

The company manufactures a wide range of products, including PPR, PP-RCT, PE-RT, HDPE, MDPE pipes and fittings, as well as PVC flexible hoses for agriculture, food grade, and domestic & plumbing industries. Euroaqua Plumtek operates under the brand names **EUROAQUA**, **Airguard** and **PLUMtek** offering a complete solution for domestic and industrial plumbing systems, which include PTMT taps, faucets, valves, hoses, and other components.


Notably, the company is a pioneer in South Asia, being the first to introduce PP-RCT technology and PB1 universal push fittings for hot and cold water plumbing - **PLUMtek**. We are also a leading manufacturer and exporter of PPR pipes and fittings in India, exporting to over 15 countries worldwide. With more than 27 years of technical and manufacturing expertise, Euroaqua Plumtek is committed to delivering high-quality solutions that reduce installation costs and extend the lifespan of piping systems, contributing to the growing needs of the Indian market.

SUCTION HOSES - HEAVY DUTY



Recommended working temperature : 10°C to 60°C.
Variation in ID/OD : [*=+-0.5] [=+-1.0] [***=+-1.5] [****=+-2.0]**

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	MAX WEIGHT ROLL	GOLD WEIGHT ROLL	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	IN.KG	IN.KG	MTRS
20	3/4	2.5	8	24	6.5	6.050	30
25	1	2.3	7	21	8.5	8.050	30
32	1-1/4	2.6	7	21	12.5	10.250	30
38	1-1/2	3	5	15	14.8	12.300	30
50	2	3.2	5	15	25.5	22.500	30
58	2-1/4	3.5	4.5	13	29	26.000	30
63	2-1/2	3.6	4.5	13	36	33.750	30
75	3	3.75	4	12	45	42.500	30
90	3-1/2	4	4	12	75	67.000	30
100	4	5.5	3.5	10	87	79.000	30
125	5	7.35	3	9	80	71.000	15 - 20
150	6	7.5	2.5	7.5	100(15Mtr)	89.000(15Mtr)	15 - 18
200	8	10	2.5	7.5	60(6Mtr)	55(6Mtr)	6 - 12
250	10	14	2.5	7.5	80(6Mtr)	-	6 - 10

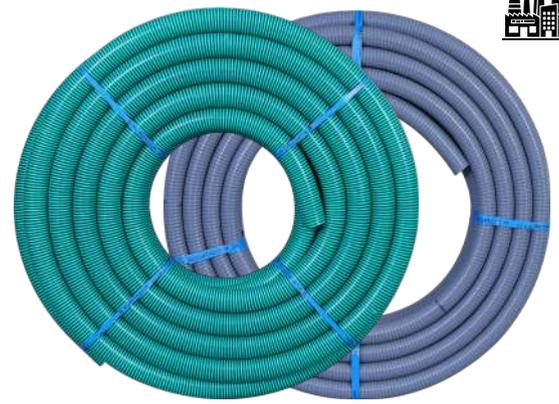

Application :

- Suction of saline water, light acids, sewage, alkaline and other chemicals except solvents
- Suction for dung cart
- Civil engineer mining and constructions etc
- Fisheries and shipping industries
- Agricultural and Marine Industry

Standard Length = 30 Mtrs / Per Roll (upto 4'')
Available Color : Green, Blue, Orange,
Heavy Duty - Grey, Olive Green



Application :

- General pumping and suction application in agriculture and construction industry
- Conveyance of waste, sludge, slurry, chemicals and other waste matter
- Irrigation purpose in agriculture with electric pumps/oil engines
- Suction & delivery of saline water, light acids, alkaline and other chemicals except solvents
- Conveying of granules or fine particles of raw materials in processing industries
- For water supply and drainage

SUCTION HOSES

Recommended working temperature : 10°C to 60°C.
Variation in ID/OD : [*=+-0.5] [=+-1.0] [***=+-1.5] [****=+-2.0]**

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	MAX WEIGHT ROLL	GOLD WEIGHT ROLL	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	IN.KG	IN.KG	MTRS
20	3/4	3.0	7	21	5.500	5.000	30
25	1	3.5	7	21	7.000	6.300	30
32	1-1/4	3.6	6.5	19	9.750	8.750	30
38	1-1/2	4.0	6.5	19	11.750	10.750	30
50	2	4.5	5	15	21.000	18.500	30
58	2-1/4	4.5	5	15	25.000	22.500	30
63	2-1/2	4.5	5	15	29.000	26.500	30
75	3	5.0	4.5	13	40.000	36.500	30
90	3-1/2	5.0	4.5	13	63.000	58.000	30
100	4	6.0	4.5	13	74.000	66.000	30
125	5	7.0	3.0	9	65.000	56.500	15
150	6	7.5	3.0	9	90.000	74.500	15


Standard Length = 30 Mtrs / Per Roll, 125mm & 150mm - 15 Mtrs Per Roll
Available Colors : Green, Blue, Orange



Recommended working temperature : 15°C to 60°C.
Variation in ID/OD : [*]=+0.5] [**]=+1.0] [***]=+1.5] [****]=+2.0]

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	MAX WEIGHT ROLL	GOLD WEIGHT ROLL	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	IN.KG	IN.KG	MTRS
20	3/4	2.0	6	18	4.500	4.100	30
25	1	2.5	6	18	5.500	5.100	30
32	1-1/4	2.5	5.5	16	8.500	8.000	30
38	1-1/2	2.5	5.5	16	9.500	9.000	30
50	2	3.0	5	15	16.50	15.500	30
58	2-1/4	3.0	4.5	13	20.00	18.500	30
63	2-1/2	3.5	4.5	13	25.00	22.750	30
75	3	3.5	4	12	36.00	32.750	30
90	3-1/2	3	3.5	10	50.00	48.000	30
100	4	2.5	3	9	57.00	54.000	30

Available Colors : Green, Blue, Orange

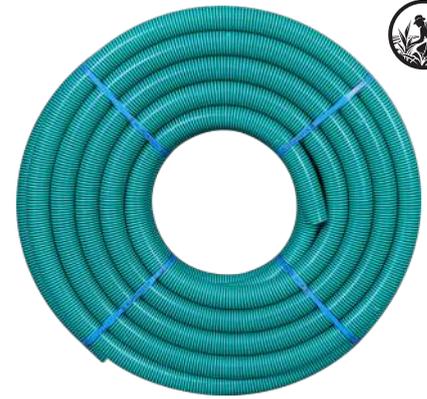

Application :

- Delivery and light suction of water
- Delivery of saline water, light acids, alkaline and other chemicals except solvents
- Suitable for the horticultural and agricultural
- For water supply and drainage



Application :

- Gardening, cleaning, cattle shed and domestic use.
- For water supply
- Industrial, shipping, construction, carwash, etc.,

EUROAQUA HEAVY DUTY BRAIDED HOSES

Recommended working temperature : 10°C to 60°C.

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	EURO WEIGHT ROLL	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	IN.KG	MTRS
12	1/2	2.5	9	27	4.000	30/50/100
20	3/4	3.0	8	24	8.500	30/50/100
25	1	3.2	8	24	12.500	30/50/100
32	1-1/4	3.5	7	21	18.000	30/50/100
38	1-1/2	4.0	6	18	26.000	30/50/100
50	2	5.0	4	12	36.000	30/50/100

Available Colors : Transparent

GANGAFLEX BRAIDED HOSES


PREMIUM | DOUBLE LAYER HOSES



Recommended working temperature : 20°C to 60°C.

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	PREMIUM WEIGHT ROLL	MAX WEIGHT ROLL	GOLD WEIGHT ROLL	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	IN.KG	IN.KG	IN.KG	MTRS
12	1/2	2.3	8	24	4.000	3.500	3.100	30/50/100
20	3/4	2.7	7	21	8.500	8.000	5.100	30/50/100
25	1	3.2	6	18	12.500	12.000	8.100	30/50/100
32	1-1/4	3.1	5.0	15	***	16	13.500	30/50/100
38	1-1/2	3.9	5.0	15	***	25	23.000	30/50/100
50	2	4.8	3	9	***	***	36.000	30/50/100

Available Colors : Green, White, Orange, Gold, Yellow/Black

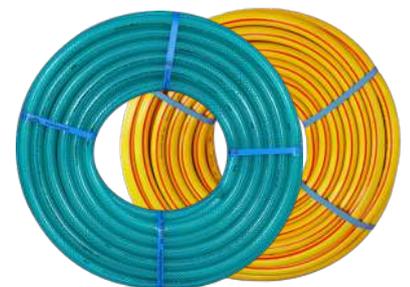

Application :

- Water supply hoses and connections for appliances
- Used in high-pressure water delivery systems, carwash, etc.,



Application :

- Light, flexible & transparent with mirror like inner smoothness
- No toxic & good quality
- Widely applied to the lines for industry, carwash, agriculture, gardening project, fishery, aquatics, etc.,

Recommended working temperature : 20°C to 60°C.

SIZE		WEIGHT ROLL	GOLD WEIGHT ROLL	SUPER GOLD WEIGHT ROLL	MAX WEIGHT ROLL		SUPER MAX WEIGHT ROLL	MILK WHITE WEIGHT ROLL	LENGTH IN
MM	INCH	IN.KG	IN.KG	IN.KG	IN.KG	IN.KG	IN.KG	IN.KG	MTRS
12	1/2	***	3.100	3.500	***	***	***	3.500	30/50/100
20	3/4	7	4.500	5.500	8.000	10.000	13.500	5.500	30/50/100
25	1	9	6.500	7	***	***	***	7.000	30/50/100
32	1 1/4	***	***	13.500	***	***	***	***	30/50/100

For Transparent Hoses

Available Colors : Green, White, Orange, Gold

LEVEL TUBE HOSES

Recommended working temperature : 10°C to 60°C.

SIZE		WEIGHT ROLL	LENGTH IN
MM	INCH	IN KG	MTRS
6	1/4	0.950	30/50/100
8	5/16	1.400	30/50/100
10	3/8	2.100	30/50/100

Available Colors : Transparent



Application :

- Setting levels for civil constructions, fencing, foundations, or decking, etc.,
- Leveling across large distances where using a spirit level or laser level may be impractical.
- Checking for slopes in landscaping or drainage.

PLUMTEK ZEBRA HOSES



Application :

- Heavy-duty hoses for long-lasting watering and irrigation systems
- High-pressure water delivery for emergency situations
- Construction industry, gardening, car wash, etc.,

Recommended working temperature : 20°C to 60°C.

SIZE		GOLD MORE LINE WEIGHT ROLL	GOLD PLAIN WEIGHT ROLL	LENGTH IN
MM	INCH	IN.KG	IN.KG	MTRS
12	1/2	4.000	3.500	30/50/100
20	3/4	6.500	5.000	30/50/100
25	1	7.500	7.000	30/50/100
32	1-1/4	12.500	13.500	30/50/100

Available Colors :


**More line (Blue - Yellow Line),
Plain (Green, Gold, Orange, Pink - White line)**



Recommended working temperature : 5°C to 60°C.


SIZE		PREMIUM WEIGHT ROLL	PREMIUM+ WEIGHT ROLL	LENGTH IN
MM	INCH	IN.KG	IN.KG	MTRS
12	1/2	4.000	4.500	30/50/100
20	3/4	6.500	8.000	30/50/100
25	1	7.500	9.500	30/50/100

Available Colors :
Premium - Green / Premium Plus - Green, Blue

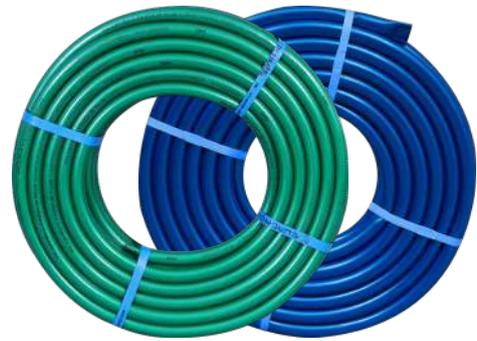

Application :

- Heavy-duty hoses for long-lasting watering/irrigation systems
- High-pressure water delivery for emergency situations
- Construction industry, gardening, car wash.

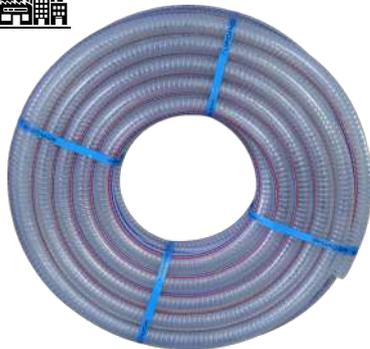

Recommended working temperature : 10°C to 60°C.

SIZE	COLOR	WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	PLUMTEK MAX FOOD GRADE WT/30 MTRS (RED/GREEN)	PLUMTEK GOLD FOOD GRADE WT/30 MTRS (RED/BLUE)	LENGTH IN
MM	***	MM	BAR	KG/CM ²	IN.KG	IN.KG	MTRS
3/4"(20mm)	Transparent	3.5	4	12	12	10	30/50/100
1"(25mm)	Transparent	4	4	12	16	12.500	30/50/100
1-1/4"(32mm)	Transparent	4.5	4	12	23	16	30/50/100
1-1/2"(38mm)	Transparent	5	3	9	29	19	30/50/100
2"(50mm)	Transparent	6	3	9	47	36	30/50/100
2-1/4"(63mm)	Transparent	7	3	9	48	40	30/50/100
2-1/2"(64mm)	Transparent	8	2	6	56	50	30/50/100
3"(75mm)	Transparent	8.5	2	6	63	58	30/50/100

Application :

- Food grade, (Red/Green)
- Transportation of liquid, milk, fruit pulp, etc...
- Suction, material handling



Recommended working temperature : 10°C to 60°C.

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	MTRS
6	1/4	2.5	20	60	30/50/100
8	5/6	3.0	20	60	30/50/100
10	3/8	3.2	20	60	30/50/100
12	1/2	3.5	15	45	30/50/100
20	3/4	4.0	15	45	30/50/100
25	1	4.1	12	36	30/50/100
32	1-1/4	4.3	12	36	30/50/100

For Airguard Hoses
Available Colors : Transparent, Yellow Ribes
Also as per customer requirements



PVC Pneumatic High Pressure Nylon Braided Hoses

Application :

- Air/Pneumatic pump
- Rockdrill, conveyor, spray, etc...
- Transportation of air by compressor
- Industrial use where application of air is required



Application :

- Super flexible heavy duty industrial suction application
- Textile industry
- Industrial vaccum cleaning
- Mining, conveying liquids dust with air, etc....

SIZE		WALL THICKNESS	BENDING RADIUS	LENGTH IN
MM	INCH	MM	MM	MTRS
20	3/4	3.50	40	30
25	1	3.50	45	30
32	1-1/4	4.00	50	30
38	1-1/2	4.00	55	30
50	2	4.00	65	30
63	2-1/2	4.50	80	30
75	3	4.50	100	30
100	4	4.50	125	30
125	5	4.50	150	15
150	6	4.50	220	15
200	8	5	270	10
250	10	7	380	10 - 20

WELDING HOSES




Application :

- Air/ Pneumatic pump
- Gas welding used for LPG and oxygen supply
- Industrial use where application of air is required

Recommended working temperature : 10°C to 60°C.

SIZE		WALL THICKNESS	WORKING PRESSURE	BURSTING PRESSURE	LENGTH IN
MM	INCH	MM	KG/CM ²	KG/CM ²	MTRS
8	5/16	3.0	32.0	65.0	50/100
10	3/8	3.5	32.0	6.0	50/100

**Twin Hoses Available
Available Colors : Red / Blue*

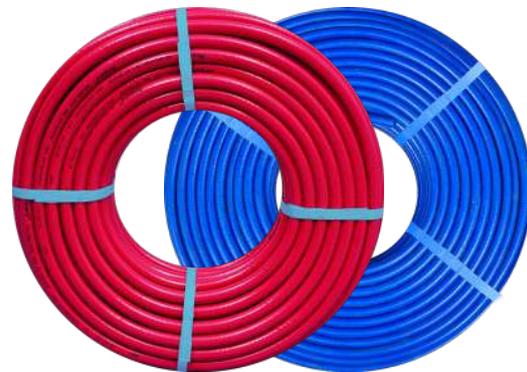

PE CORRUGATED HOSES



Application :


- Flexible applications
- Electrical wiring, panel boards, A/C drain, etc...

SIZE MM	COLOR	LENGTH / ROLL MTR
16mm	Grey/Black	50
20mm	Grey/Black	50
25mm	Grey/Black	25
32mm	Grey/Black	25
40mm	Grey/Black	25

OTHER RANGE OF PRODUCTS



PPR & PPR-CT PIPES & FITTINGS



Operating Temperature
-10°C to 99°C



Sizes Available
Ø20mm - Ø315mm



Sizes Available
Ø20mm - Ø315mm

HDPE PIPES & FITTINGS

(PE 100 - BLACK - IMPORTED MATERIAL)



PE-RT PB1 UNIVERSAL PUSHFIT
SUITABLE FOR HDPE PIPES



Socket Fusion Fittings
Sizes Available
Ø20mm - Ø160mm

MDPE PIPES & FITTINGS



FOOD GRADE



FLEXIBLE



AFFORDABLE



DURABLE



EXCELLENT FLOW



Sizes Available
20 mm




Jal Jeevan Mission, India



Size Available

20, 23 & 32mm - FAST FIT
20mm - 160mm - SOCKET WELDING



Operating Temperature
-40°C to +99°C

NO GLUE NEEDED ✗ NO WELDING NEEDED
JUST PUSH INSIDE ✓ EASY AND FAST FIT



COMBINATION OF
Flexibility & Strength




PTMT TAPS | FAUCETS | VALVE'S



* For Trade Inquiry Please Contact our Marketing Team / Customer Care

OUR BRANCHES

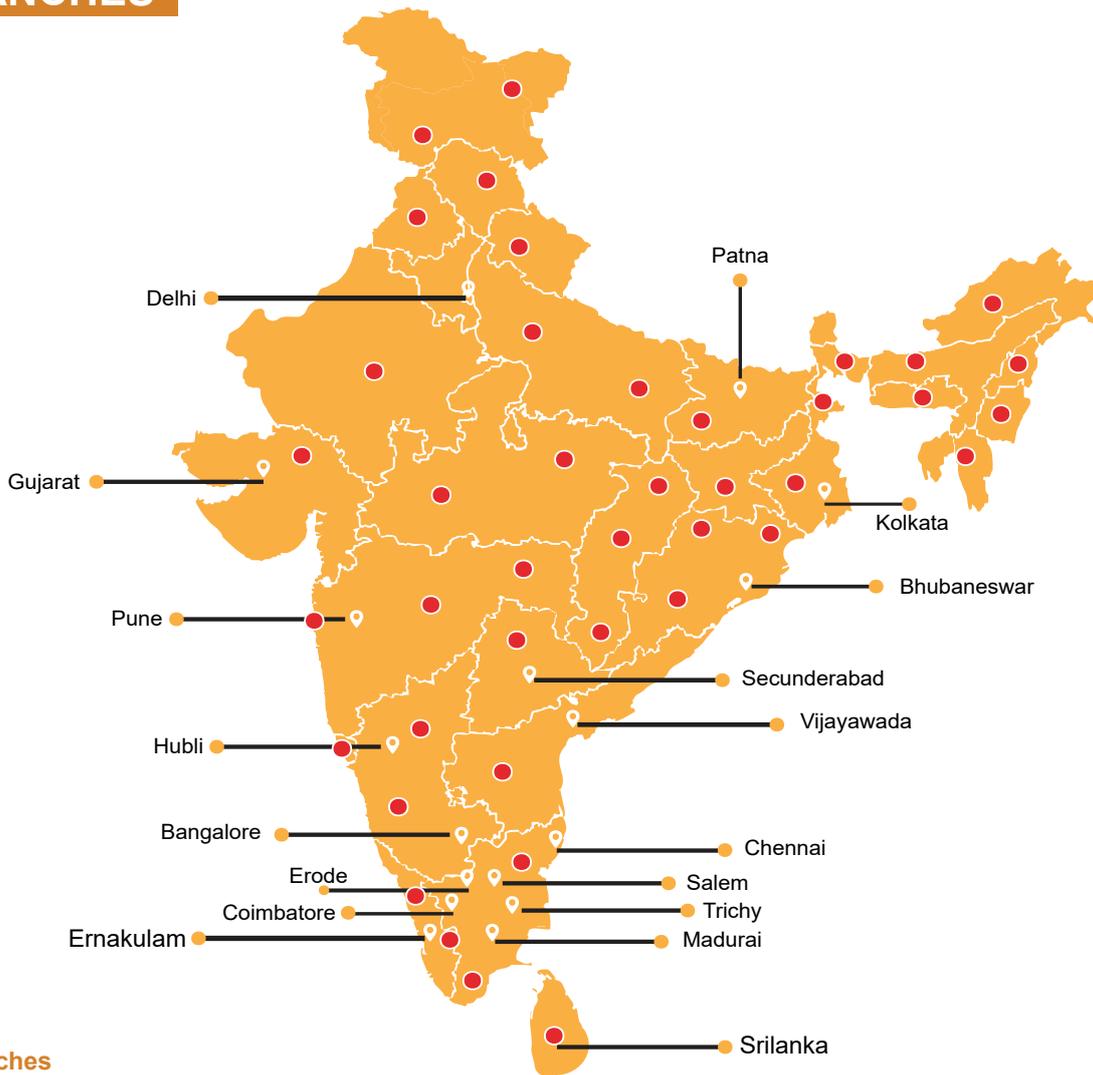

 **Our Branches**

 **Products Available Areas (Other than Branches)**



Scan for Plumtek Youtube



-  TAPS & FAUCETS
-  PVC HOSES
-  PPR PIPES & FITTINGS
-  PE-RT PIPES & FITTINGS
-  HDPE PIPES & FITTINGS

Scan for Website



www.euroaquappr.com

Manufactured By

EUROAQUA PLUMTEK PVT LTD

An ISO 9001 - 2015 Certified Company

Head Office: Sankagiri - 637 301, Salem, Tamilnadu, India.

Customer Care:  +91 4283 242936/37  +91 99650 05555, 73730 73333

 support@euroaquappr.com  www.plumtek.in | www.euroaquappr.com

Scan for Website



www.plumtek.in